



**Hidro
Pnevmo
Tehnika**


3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

CARTRIDGE RELIEF VALVE


KPZ .. / ..






KPZ 10 / .. A



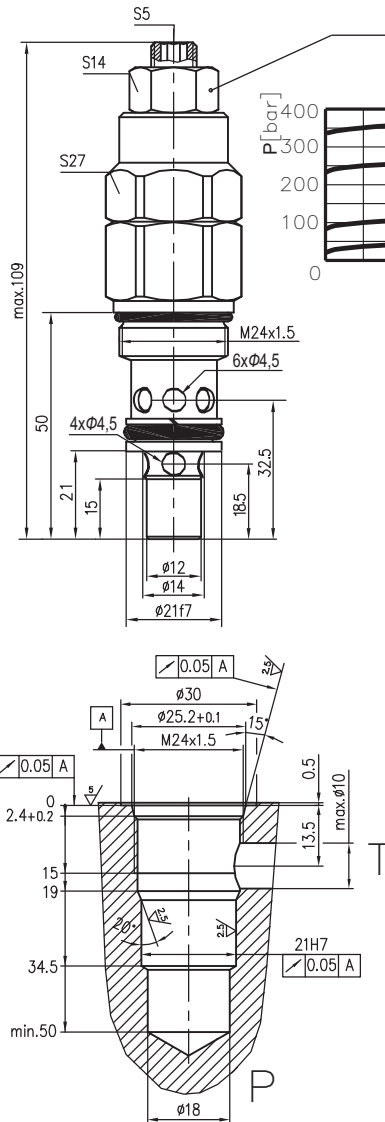


Colour
See table below

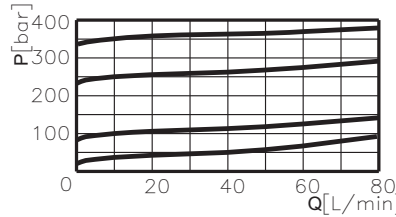

KPZ 6 / .. A

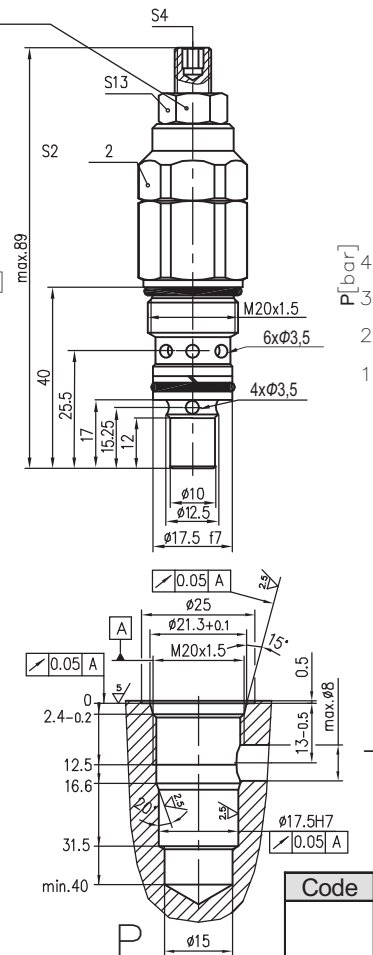

Code	Adjustment
A	Leakproof hex. socket screw 
B	Handknob and locknut 
C	Sealing cap 

Type	P _{max} bar	Q _{nom.} L/min
KPZ6/..	350	20
KPZ10/..	350	40

Code	Pressure range		Colour
	Adj. pressure range bar	Standard setting (Q=5 L/min) bar	
10	10...100	80	White
25	30...250	180	Yellow
35	70...350	250	Black

Note: 1. All performances and calibrations are carried out by using hydraulic oil with viscosity approx. 46 cSt at 50°C
2. Tightening torque: 35 N.m.
3. Body coating – Zn.
4. Working fluid: Viscosity - 10...100 mm²/s. Temperature range:-20°C...+80°C. Filtration absolute: 25 µm.

ORDERING CODE

KPZ 6 / 10 A

Type

Pressure range code: **10; 25; 35**

Adjustment code: **A; B; C**