





**Hidro
Pnevmo
Tehnika**

3, Vojeli St., Kazanlak, Bulgaria
Tel.: +359 431/ 62 228, 68 440
e-mail : info@hpt-bg.com
www.hpt-bg.com

SOLENOID OPERATED DIRECTIONAL CONTROL VALVE

. RS04 .. / ..

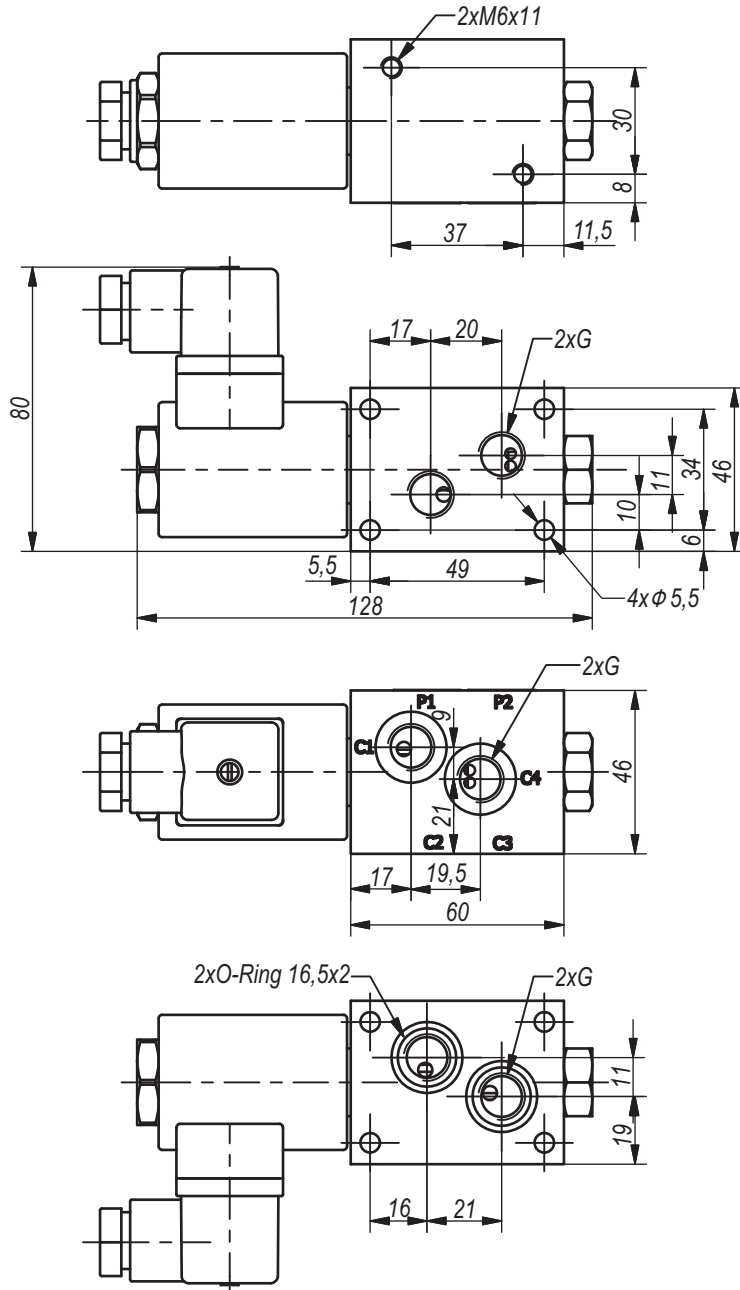

Note:

1. All performances and calibration are carried out by using hydraulic oil with viscosity approx 46 cSt at 50 °C.
2. Tightening torque for the solenoid - 20 N.m.

TECHNICAL DATA		
General		
Ambient temperature	°C	-20...+50
Hydraulic		
Maximal pressure	bar	200
Maximal flow rate	L/min	10
Working fluid - mineral oil		
- viscosity	mm ² /s	10...100
- filtration level	mm	25 or better
- temperature	°C	-20...+80
Power supply		
Voltage	V DC	12 24
	V AC	110/50Hz 220/50Hz

ORDERING CODE

. RS04 14 / 12

Number of sections: 2,3,4 One section: Omit	Type	Port threads "G" - code: G1/4" - 14	Operating voltage - code: 12V / 00Hz - 12 24V / 00Hz - 24 110V/50Hz - 110 220V/50Hz - 220
--	------	---	---