






**Hidro
Pnevmo
Tehnika**



3, Eng. Felix Vozhely St.,
6100 Kazanlak, Bulgaria
Tel.: +359 431 62 228
+359 431 68 440
e-mail: info@hpt-bg.com
www.hpt-bg.com

HYDRAULIC MOTOR BLOCKS TYPE BD

BDR 1205 . . / . .

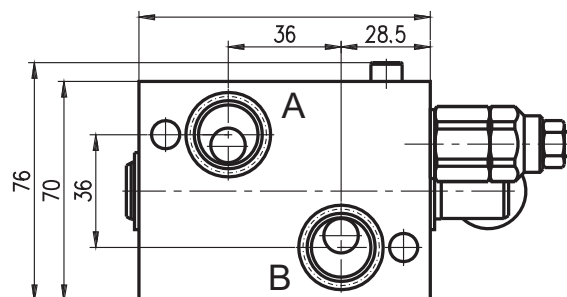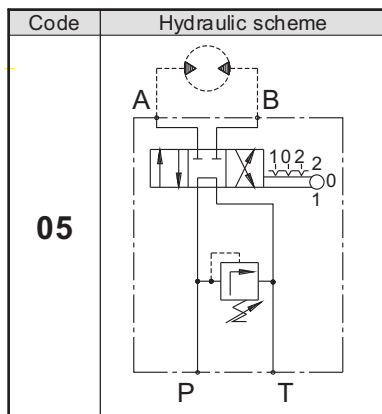



only for type BDR 1205B/..

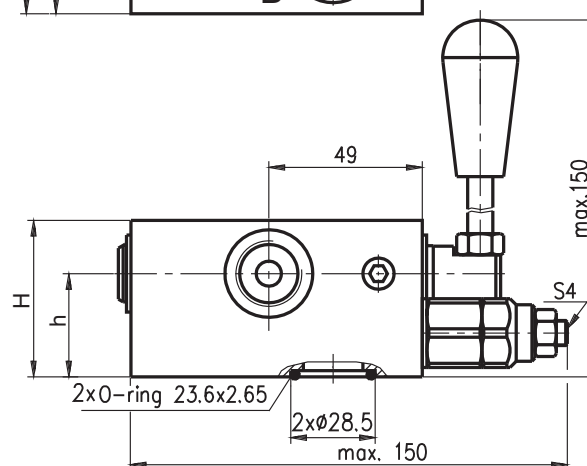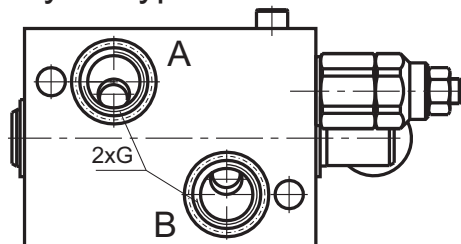

Pressure range			
Code	Standard setting (Q=5l/min)	Adj. pressure range	Colour
	bar	bar	
10	80	10...100	White
25	180	30...250	Yellow

Code	Adjustment
A	Leakproof hex. socket screw
B	Handknob and locknut
C	Sealing cap

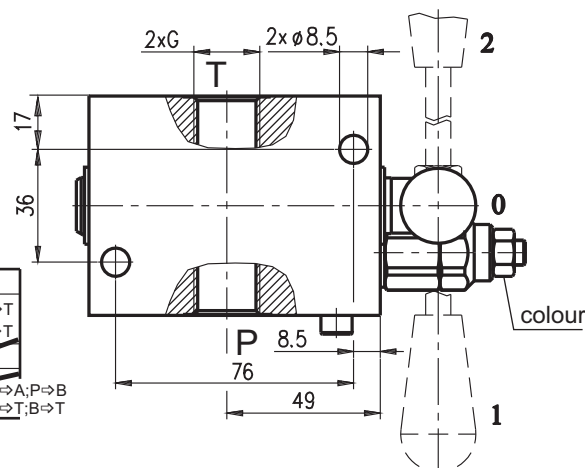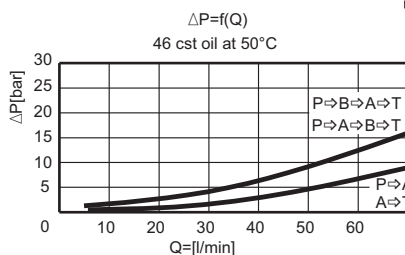

Type	Nom. flow rate	P _{max.}	Port threads G	H	h
	L/min	bar	-	mm	mm
BDR 1205 . . / . .	70	250	2xG1/2 - DIN 3852	48	32
BDS 1205 B / . .	70	250	4xG1/2 - DIN 3852	49	33

ORDERING CODE

BD R 12 05 L / 10 A

Type

Hydraulic motor type - code:
MP or MR - **R**

Scheme code:
05

Adjustment code:
A; B; C
(see table above)

Port threads G - code:
G1/2 - **12**

Body material - code:
Aluminium - **Omit**
Brass - **L**

Pressure range code:
10; 25